

Radio/Stereo: Service and Repair




Radio Removing Tool

Special Tool(s)


REMOVAL

1. **NOTE:** The following removal and installation procedures apply to all original equipment audio units.
2. Disconnect the battery ground cable.

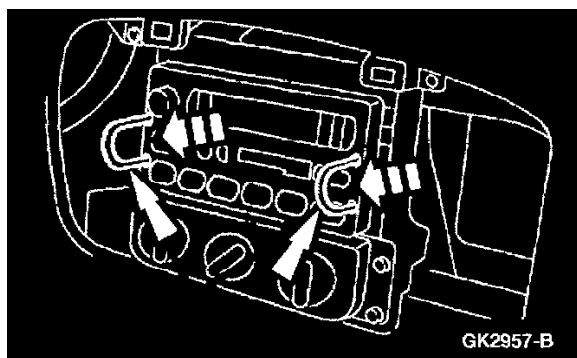

3. Remove the radio chassis.

^ Insert Radio Removal Tool into the radio face plate, release the radio retaining clips and pull outward on Radio Removal Tool while pulling the audio unit away from the instrument panel.

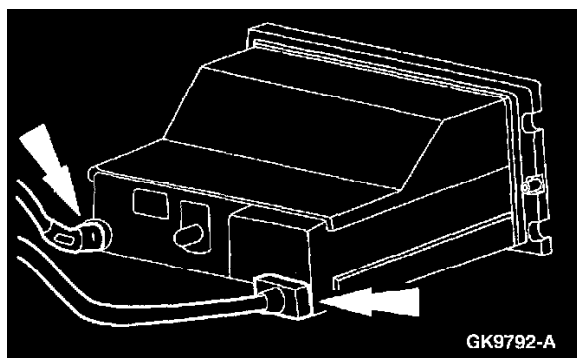

4. Disconnect the radio antenna lead in cable and the radio electrical connector.

INSTALLATION

1. To install, reverse the removal procedure.

NOTE: When the battery has been disconnected and reconnected, some abnormal drive symptoms may occur while the vehicle relearns its adaptive strategy. The vehicle may need to be driven **10 miles (16 km)** or more to relearn the strategy.