



Control Assembly: Testing and Inspection

TO TEST	Connect Self-Powered Test Lamp or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
A/C Clutch Circuit	489 (PK/BK) and 348 (P)	Off Max A/C Norm A/C Vent Floor Def/Flr Defrost	Open Circuit Closed Circuit Closed Circuit Open Circuit Open Circuit Closed Circuit Closed Circuit
Blower Motor Circuit	489 (PK/BK) and 753 (Y/R)	Off All other positions	Open Circuit Closed Circuit

Function Selector Switch - Component Testing Procedure

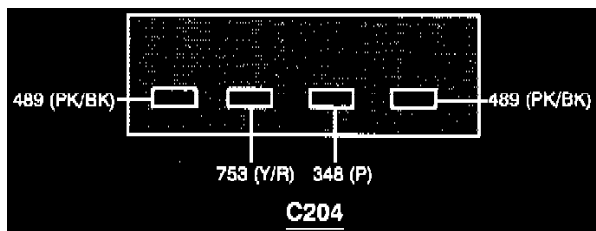

Function Selector Switch - Terminal Locations

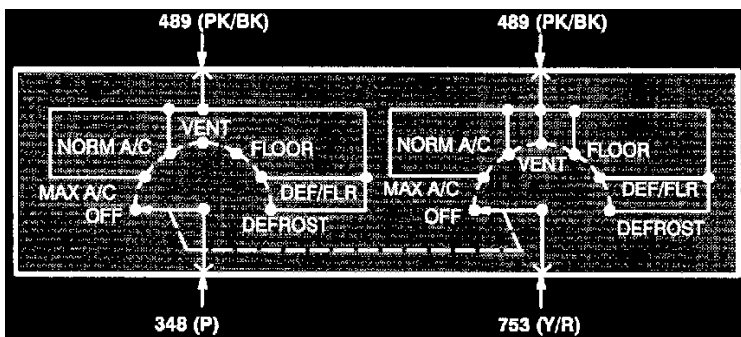

Function Selector Switch - Schematic