



Wiper Relay: Testing and Inspection

RELAY CIRCUIT	TO TEST	Connect Self-Powered Test Lamps or Ohmmeter to Terminals	Connect Jumper Wires From Positive Battery Terminal to Terminals	Connect Jumper Wires From Ground to Terminals	A Good Relay Will Indicate
		2 and 1, 3, 4, 5	—	—	5Ω or Greater
		4	1 and 3	—	Battery Voltage
		5	1 and 3	2	Battery Voltage

Component Testing Procedure



Terminals

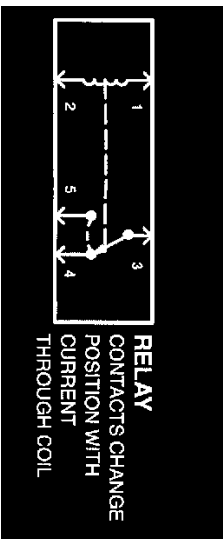

Schematic